

MINI-CAPSTONE: BUS STOP SHELTER - ROUGH SKETCH

S07 Structural BIM | Units: meters | Not to exact scale

FLOOR / ROOF PLAN

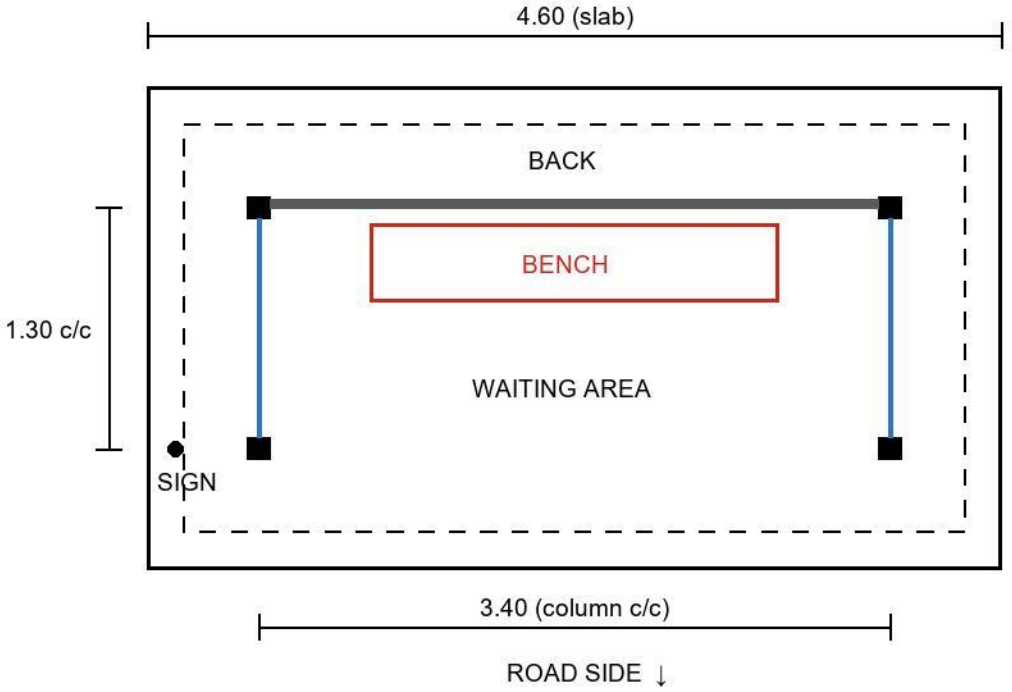

FRONT ELEVATION

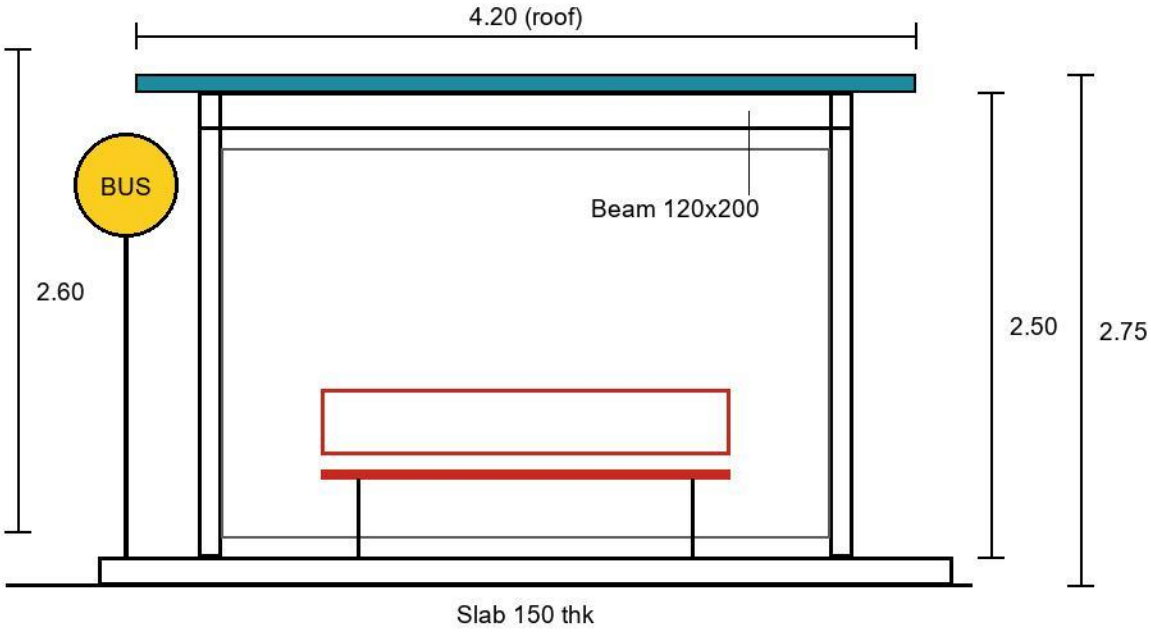

2.50 = column height above slab; 2.75 = overall height

- Column C1-C4, 120x120 steel
- Back wall panel
- Side glass (window)
- Bench (furniture)
- – Roof slab outline 4.20 x 2.20 (above)

STRUCTURAL: 150 slab-on-grade, 4 steel columns, 4 perimeter beams, 100 roof slab.
ARCHITECTURAL: back wall panel, 2 side glass panels, bench, bus stop sign.
Roof overhang from column c/l: 0.45 front/back, 0.40 each side. Open front faces road.